



MALE CONNECTOR

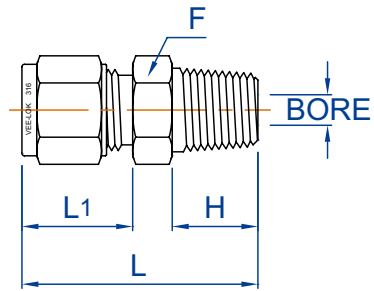

TUBE O.D.	MALE THREAD	PART NO.	L	L1	H	F	BORE
MILLIMETERS							
6	1/8	MMC6-2	32.90	17.70	9.50	14	5.00
6	1/4	MMC6-4	38.10	17.70	14.30	14	5.00
6	3/8	MMC6-6	38.50	17.70	14.30	18	5.00
6	1/2	MMC6-8	44.80	17.70	19.10	22	5.00
8	1/8	MMC8-2	34.20	18.60	9.50	15	5.00
8	1/4	MMC8-4	38.80	18.60	14.30	15	6.50
8	3/8	MMC8-6	39.30	18.60	14.30	18	6.50
8	1/2	MMC8-8	45.60	18.60	19.10	22	6.50
10	1/8	MMC10-2	36.10	19.50	9.50	18	5.00
10	1/4	MMC10-4	40.90	19.50	14.30	18	7.10
10	3/8	MMC10-6	40.90	19.50	14.30	18	7.90
10	1/2	MMC10-8	47.50	19.50	19.10	22	7.90
10	3/4	MMC10-12	46.40	19.50	19.10	27	7.90
12	1/4	MMC12-4	43.40	22.00	14.30	22	7.10
12	3/8	MMC12-6	43.40	22.00	14.30	22	9.50
12	1/2	MMC12-8	49.00	22.00	19.10	22	9.50
12	3/4	MMC12-12	50.50	22.00	19.10	27	9.50
14	1/4	MMC14-4	44.20	22.00	14.30	24	7.10
14	3/8	MMC14-6	44.20	22.00	14.30	24	9.50
14	1/2	MMC14-8	49.00	22.00	19.10	24	11.10
15	1/2	MMC15-8	49.00	22.00	19.10	24	11.90
16	3/8	MMC16-6	44.10	22.00	14.30	24	9.50
16	1/2	MMC16-8	49.00	22.00	19.10	24	11.90
16	3/4	MMC16-12	50.50	22.00	19.10	27	12.70
18	1/2	MMC18-8	50.60	22.00	19.10	27	11.90
18	3/4	MMC18-12	50.60	22.00	19.10	27	15.00
20	1/2	MMC20-8	50.60	22.00	19.10	30	11.90
20	3/4	MMC20-12	52.30	22.00	19.10	30	16.00
22	3/4	MMC22-12	52.30	22.00	19.10	30	16.00
25	1/2	MMC25-8	57.50	26.50	19.10	35	11.90
25	3/4	MMC25-12	57.50	26.50	19.10	35	16.00
25	1	MMC25-16	62.30	26.50	23.80	35	22.00

Dimensions for reference only, subject to change without prior notice

BULKHEAD MALE CONNECTOR

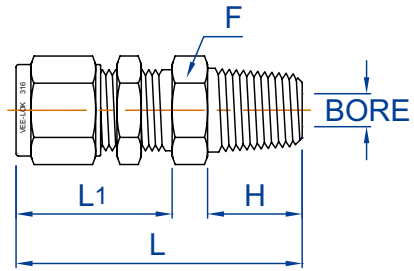

TUBE O.D.	MALE THREAD	PART NO.	L	L1	H	F	Panel Hole Size	Max. Panel Thick.	BORE
INCHES									
1/8	1/8	BMC2-2	1.830	1.23	0.38	1/2	21/64	0.50	0.09
1/4	1/8	BMC4-2	1.950	1.31	0.38	5/8	29/64	0.40	0.20
1/4	1/4	BMC4-4	2.132	1.31	0.56	5/8	29/64	0.40	0.20
3/8	1/4	BMC6-4	2.265	1.44	0.56	3/4	37/64	0.44	0.28
3/8	3/8	BMC6-6	2.265	1.44	0.56	3/4	37/64	0.44	0.28
3/8	1/2	BMC6-8	2.480	1.44	0.75	7/8	37/64	0.44	0.28
1/2	3/8	BMC8-6	2.494	1.65	0.56	15/16	49/64	0.50	0.38
1/2	1/2	BMC8-8	2.712	1.65	0.75	15/16	49/64	0.50	0.41
3/4	3/4	BMC12-12	3.000	1.87	0.75	1-3/16	1-1/64	0.66	0.61
1	1	BMC16-16	3.720	2.27	0.94	1-5/8	1-21/64	0.75	0.86

TUBE O.D.	MALE THREAD	PART NO.	L	L1	H	F	Panel Hole Size	Max. Panel Thick.	BORE
MILLIMETERS									
6	1/8	MBMC6-2	49.60	33.70	9.50	16	11.50	10.20	5.00
6	1/4	MBMC6-4	53.50	33.70	14.30	16	11.50	10.20	5.00
8	1/8	MBMC8-2	52.30	36.00	9.50	18	13.10	11.20	6.50
8	1/4	MBMC8-4	57.50	36.00	14.30	18	13.10	11.20	7.90
10	1/4	MBMC10-4	58.40	37.00	14.30	22	16.30	11.20	7.90
10	3/8	MBMC10-6	58.40	37.00	14.30	22	16.30	11.20	7.90
10	1/2	MBMC10-8	63.10	37.00	19.00	22	16.30	11.20	7.90
12	1/4	MBMC12-4	63.30	10.10	14.30	24	19.50	12.70	7.10
12	3/8	MBMC12-6	64.50	10.10	14.30	24	19.50	12.70	9.50
12	1/2	MBMC12-8	67.50	10.10	19.00	24	19.50	12.70	9.50

Dimensions for reference only, subject to change without prior notice